

clover[®] Bottled Water Coolers Specifications

MODELS	B14A	B14B
COLD WATER	0.9 GAL OF 50°F/HR (3.5 ℓ of 10°C)	
HOT WATER	2 GAL OF 185°F/HR (7.5 ℓ OF 85 ± 5°C)	NON
ROOM TEMP.WATER	NON	O
COOLER DIMENSIONS	12.3" W (313mm) 12.7" D (323mm) 37.9" H (963mm)	
SHIPPING WEIGHT	38.6 lbs (17.5 kg)	36.4 lbs (16.5 kg)



COLD AND HOT WATER

THE ABOVE RATES TESTED IN AMBIENT TEMPERATURE 90°F (32°C),
WATER INLET TEMPERATURE 80°F (27°C)

CABINET

Top and front panels are molded of ABS and side panels are of electric zinccoated steels with High Polymer Polyester resin.

COLOR

Fresh gray available as standard.

FAUCETS

Durable polypropylene.
Self closing type. Easy to operate.

DRIP RECEPTACLE

Concealed, liftout design, high impact, durable ABS. Removable, anti-splash grid diverts drip water into receptacle.

COLD WATER TANK

Type 304 stainless steel.

COLD WATER THERMOSTAT

Temperature is controlled to 35.6°F~53.6°F (2 ~ 12°C) by adjustable thermostat, easily accessible on back.

REFRIGERATION UNIT

Convection cooled condenser, internally spring mounted hermetically sealed compressor with automatic overload protector. No lubricant needed. Refrigerant is controlled by accurately calibrated capillary tube.

HOT WATER TANK

Hygienic type stainless. Highly efficient internal heating element. Non-adjustable thermostat with manual reset safety limiter. Convenient hot water ON/OFF switch. Fire proof insulation.

HOT WATER THERMOSTAT

(Model B14A)Water Temperature is controlled to nearly 185°F (85°C) by automatic, On-off switch is easily accessible on back

ELECTRICAL

220V~240V (±10%) 50/60 Hz,
100V~127V (±10%) 50/60 Hz
Provided with power cord.
Units for other power supplies available upon special order.

QUALITY



Our models covered by these specifications are manufactured to comply with the standard of overseas quality program.

WARRANTY

One year on the sealed refrigeration system and most component parts.

Exclusive Features

Hot Water Safer Faucet

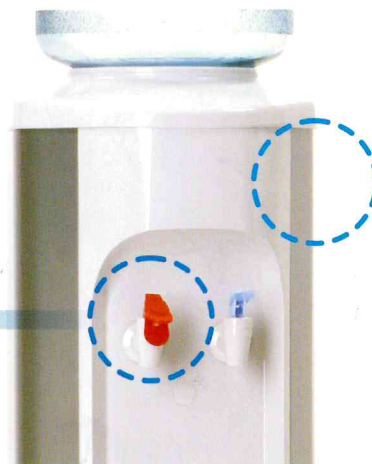

Cup Dispenser

Easy attachment on the side of cabinet for user's convenience.

Specifications are subject to change without notice.

 **CLOVER CO., LTD.**

911-2, HOGYE-DONG, DONGAN-GU, ANYANG, GYEONGGI-DO, 431-836, KOREA
TEL : 82-31-453-8288(Overseas Sales Dept.) / 456-6266(Rep.) FAX : 82-31-425-8115
E-MAIL : clover@clovercooler.co.kr [http:// www.clovercooler.co.kr](http://www.clovercooler.co.kr)